

FD 3302 Document Folder



AIR-SUCTION DOCUMENT FOLDING






- Processes up to 18,600 sheets per hour
- Air suction feed system
- High performance compact tabletop unit
- Automatic paper size detection
- Easily handles heavy and coated stock



Southwest Binding & Laminating PO Box 150 Maryland Heights, MO 63043-9150 (314) 739-4400 ~ (800) 325-3628 www.swbindinglaminating.com

The FD 3302 Air-Suction Document Folder offers high performance folding in a compact tabletop unit. The air-suction feed technology reduces static electricity and minimizes feed marks common in traditional friction feed systems. With a speed of up to 18,600 sheets per hour, and a feed tray capacity of up to 625 sheets, the FD 3302 quickly powers through a range of applications, all at the touch of a button. It's designed to handle a variety of paper weights and sizes, up to 25.5" long. User-friendly features include automatic paper size detection and fold plate settings, a color touchscreen control panel, a four-digit counter with batch counting, six programmed fold settings, and the ability to store up to 30 custom folds.

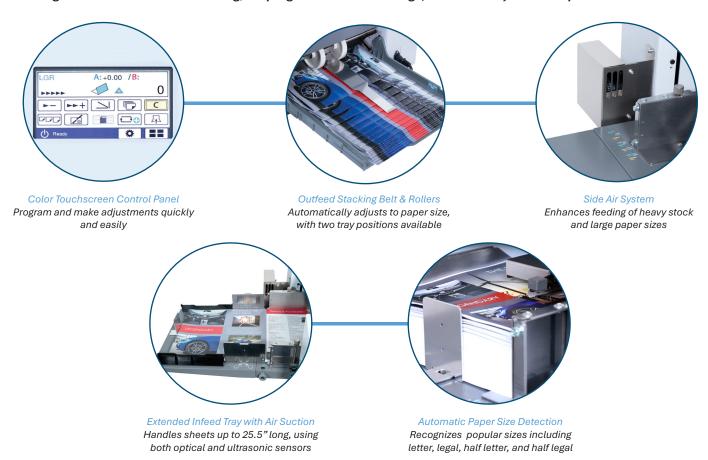

STANDARD FEATURES **OPTIONS SPECIFICATIONS** Air-suction feed system 402 Series Air Jogger Speed Up to 18,600 sheets/hour (11", single Color touchscreen control panel fold) Five speed levels Extended infeed for sheets up to 25.5" long Infeed Capacity Up to 1.96" high, 625 sheets (64gsm) Automatic paper size detection Pre-Set Folds C, Z, Half, Fold Out, Double Parallel, Side air system Gate, Custom, Cross Fold created by feeding through a second time Adjustable air flow **Custom Folds** Up to 30 Double feed detection 4.73" x 7.2" up to 12.2" x 25.5" Paper Sizes Outfeed stacker automatically adjusts (120 x 183mm up to 310 x 648mm) Batch counting Uncoated: 52.3 - 157gsm (14 - 40#) Paper Weight Pre-programmed with 6 standard folds Coated: 73.3 - 157gsm (19 - 40#) Maximum: up to 230gsm (single fold)* Up to 30 custom folds Noise reduction Feed Type Air suction belt Built-in DC fans for quiet operation Double Feed Detection Optical and ultrasonic sensors Four-digit counter Dimensions 53.3" L x 23.2" D x 24.2" H Adjustable stack height lever (1354 x 589 x 615mm) Four fold rollers Weight 157 lbs (71kg) Fault detection features 110V-240, 50/60 Hz Power * Maximum paper weight 230gsm with limitations. Testing is required. Easy access to paper path

www.formax.com

New Hampshire, USA

6/2024