


Loading film and start up.






1. Lift up small handle on side.

2. Open top cover by lifting up.

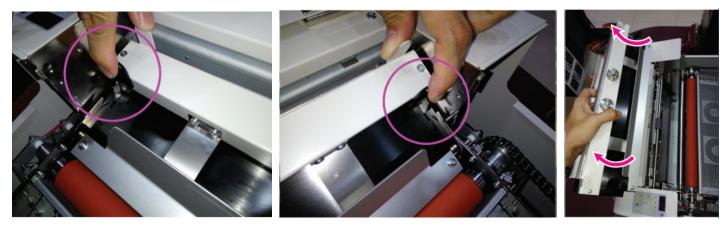

3. Press the left and right brackets and lift the front direction board feeder up gently.

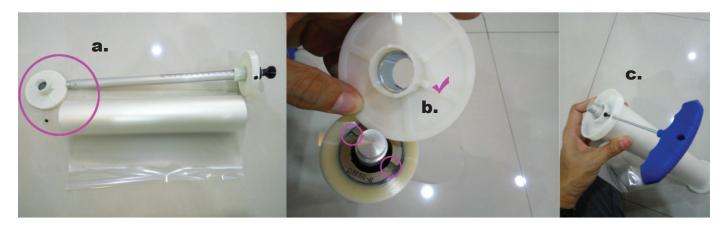

- 4. Load the roll of film onto the film mandrel. (same process for top and bottom mandrels).
 - **a.** Unlock the left side, slide roll of film onto mandrel
 - **b.** Line up the slot lines, place end cap back on mandrel
 - c. Tighten the screw with tool provided





5. Insert the **top film roll** into the bracket with film


facing direction shown. Make sure the **silver pin** is visible.



6. Press the **left and right** bracket and pull down the bottom tray. Insert **bottom film roll** to feed as shown in (**d**.). Make sure the **silver pin** is visible.



7. Pull the top and bottom films in direction shown above. Pull films up as shown in (**e**.) with yellow arrows.



8. Pull **top and bottom films** from behind together and align films.



10. Close top cover.




12. Turn power **on** and wait until **READY** light stops blinking. Press **W/CUT** and **START/STOP together** to start feeding.



9. Flip down the front direction board (feeder).



11. Slightly tighten the **top film** and **lock** handle on side.



13. Film will fuse together and come out the back of the machine.





14. *NOTE:* If previous setting is correct, the film should encapsulate after 1.5 - 2ft. of feeding.

If film is not aligned, please go back to pg 3 setup.

Setting Digital Control for Sheet Cut



 While the L/CUT is still on, press W/CUT and R Margin together and you will hear "tick" sound.



2. Press W/CUT and START/ STOP together.



3. The film will be cut.



4. Auto-feed tray setup for 8.5" x 11"



5. Auto-feed tray setup for 11" x 17" and 12" x18"



Laminate with L/Cut (for cut sheets)





Press **START/STOP** button, lamination will start and machine will auto-cut in the back.

Laminate without L/Cut (for continuous film)





Press L/CUT and turn off, press **START/STOP** button to start. Lamination will start without auto-cut at the back of the machine.



NOTE: Lift small handle on side when laminator is not in use.



Notes



For Technical Service DataBind Corporation Meady Dead, Enfield, CT, 0608

89 Moody Road, Enfield, CT 06082

860.265.3222 Fax: 860.265.2380

www.data-bind.com