

TRIUMPH® 4350

Fully automatic tabletop cutter with electric blade drive, automatic clamp, and EASY CUT blade activation.

| | |
|------------------------------------|--------|
| Cutting width, inches | 16 7/8 |
| Cutting height, inches | 1 1/2 |
| Narrow cut, inches | 1 3/8 |
| Length behind blade, inches | 17 |



optional stand



optional cabinet

Comprehensive SCS safety package: patented EASY CUT electronic blade activation bars for true two-hand operation; transparent, electronically controlled front safety guard; transparent safety cover on rear table; main switch and safety lock with key; 24 volt controls (low voltage); patented IDEAL safety drive; automatic blade and clamp return from every position; disc brake for instant blade stop; blade changing device covers cutting edge of blade; blade depth adjustment from outside of machine; blade and cutting stick can be changed without removing covers.

Electric blade and clamp drive. Spindle-guided back gauge with calibrated crank. Front table digital display (cm or inches) for precise back gauge positioning. Bright, LED optical cutting line. Patented automatic clamp. Precision side guide. High quality, German steel blade. Solid steel blade carrier and adjustable blade guides. All-metal construction. Optional stand, or cabinet with storage shelves.

Specifications

| | |
|---------------------------------------|-------------------------------|
| Electrical requirements | 115 V, 60 Hz |
| Motor output, horsepower | 3/5 |
| Dimensions (D x W x H), inches | 34 1/4 x 25 x 14 ¹ |
| Shipping weight, pounds | 200 ² |

¹height with stand is 42 3/4 inches, height with cabinet is 42 1/2 inches

²shipping weight with stand is 226 pounds, shipping weight with cabinet is 295 pounds

TRIUMPH® 4350

Features



TRANSPARENT SAFETY GUARD

A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.



BACK GAUGE HAND CRANK

The calibrated hand crank is used to set the spindle-guided back gauge.




EASY CUT BLADE ACTIVATION BARS

Patented EASY CUT blade activation bars ensure true, two-hand operation.



DIGITAL DISPLAY

The LED measurement display ensures precise positioning of the back gauge and can be set to cm or inches.

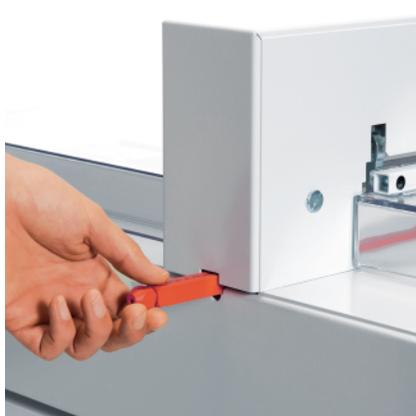

EASY CUTTING STICK CHANGE

Cutting sticks can be turned or changed easily from the outside of the machine—no tools are required.



SAFE BLADE CHANGES

Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.

